

M3



4 pôles - 1.500/1.800 rpm

Triphasés

Description					Caractéristiques mécaniques								Caractéristiques électriques					
Code	Type	GR	SP	II2D Classe temp.	Moment statique*		Force centrifuge				Poids		Puissance absorb. max		Courant max		Ia/In	
					kgmm	60Hz	50Hz	60Hz	50Hz	60Hz	kg	60Hz	50Hz	60Hz	400V 50Hz	460V 60Hz	50Hz	60Hz
601514	M15/36-S02	00	•	120°C	12,1	12,1	30,5	43,8	0,30	0,43	5,40	5,40	85	95	0,21	0,20	1,78	1,95
601515	M15/81-S02	00	•	120°C	29,8	20,2	75,0	73,0	0,74	0,72	6,30	6,0	85	95	0,21	0,20	1,78	1,95

Monophasés

Code	Type	GR	SP	II2D Classe temp.	Moment statique*		Force centrifuge				Poids		Puissance absorb. max		Courant max		Ia/In	
					kgmm	60Hz	50Hz	60Hz	50Hz	60Hz	kg	60Hz	50Hz	60Hz	220V 50Hz	115V 60Hz	50Hz	60Hz
601514	M15/36-S02	00	•	120°C	12,1	12,1	30,5	43,8	0,30	0,43	5,40	5,40	90	100	0,43	1,00	1,20	1,30
601515	M15/81-S02	00	•	120°C	29,8	20,2	75,0	73,0	0,74	0,72	6,30	6,0	90	100	0,43	1,00	1,20	1,30

* Moment dynamique = 2 x moment statique.

Ia/In = rapport entre courant de démarrage et courant max


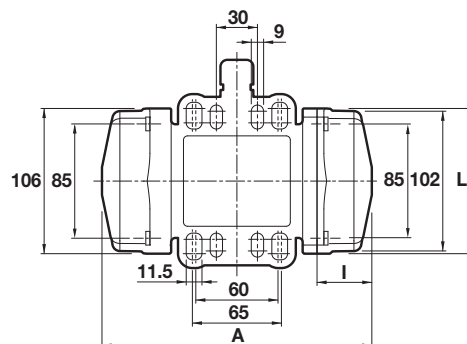


Fig. M1

Caractéristiques dimensionnelles (mm)

Type	Fig.	A	B	C	Multi-trous		Trous		F	H	I	ØL	M	N	P	Condensateur (µF)		Serre-câbles
					D	E	ØG	N°								220V 50Hz	115V 60Hz	
M15/36-S02	M1	214	123	127	Voir figure		9	4	24	70	59	106	86	106	88,5	-	-	M20X1,5
M15/81-S02	M1	235																

Type	Fig.	A	B	C	Multi-trous		Trous		F	H	I	ØL	M	N	P	Condensateur (µF)		Serre-câbles
					D	E	ØG	N°								220V 50Hz	115V 60Hz	
M15/36-S02	M1	214	123	127	Voir figure		9	4	24	70	59	106	86	106	88,5	3,15	25	M20X1,5
M15/81-S02	M1	235																