


## 8 pôles - 750/900 rpm

### Triphasés

| Description |                          |    |   | Caractéristiques mécaniques |      |                  |             |             |             |       |      | Caractéristiques électriques |      |             |           |       |      |      |      |
|-------------|--------------------------|----|---|-----------------------------|------|------------------|-------------|-------------|-------------|-------|------|------------------------------|------|-------------|-----------|-------|------|------|------|
| Code        | Type                     | GR |   | Moment statique*            |      | Force centrifuge |             |             |             | Poids |      | Puissance absorb. max        |      | Courant max |           | Ia/In |      | 50Hz | 60Hz |
|             |                          |    |   | 50Hz                        | 60Hz | 50Hz             | 60Hz        | 50Hz        | 60Hz        | 50Hz  | 60Hz | 50Hz                         | 60Hz | 400V 50Hz   | 460V 60Hz | 50Hz  | 60Hz |      |      |
| 602561      | <b>MVSS 075/150-S02</b>  | 20 | • | 163                         | 163  | <b>104</b>       | <b>149</b>  | <b>1,02</b> | <b>1,46</b> | 22,5  | 22,5 | 230                          | 250  | 0,85        | 0,76      | 2,13  | 2,11 |      |      |
| 602647      | <b>MVSS 075/260-S08</b>  | 35 | • | 275                         | 275  | <b>174</b>       | <b>250</b>  | <b>1,71</b> | <b>2,45</b> | 34,5  | 34,5 | 375                          | 410  | 0,81        | 0,80      | 2,22  | 2,38 |      |      |
| 602627      | <b>MVSS 075/400-S08</b>  | 35 | • | 457                         | 457  | <b>288</b>       | <b>415</b>  | <b>2,83</b> | <b>4,07</b> | 41,0  | 41,0 | 375                          | 410  | 0,81        | 0,80      | 2,22  | 2,38 |      |      |
| 602620      | <b>MVSS 075/660-S08</b>  | 40 | • | 723                         | 723  | <b>456</b>       | <b>656</b>  | <b>4,47</b> | <b>6,44</b> | 54,0  | 54,0 | 400                          | 450  | 1,20        | 1,20      | 2,38  | 2,58 |      |      |
| 602621      | <b>MVSS 075/910-S08</b>  | 50 | • | 1012                        | 1012 | <b>637</b>       | <b>917</b>  | <b>6,25</b> | <b>9,00</b> | 67,0  | 67,0 | 400                          | 500  | 1,40        | 1,30      | 2,38  | 2,85 |      |      |
| 602622      | <b>MVSS 075/1310-S08</b> | 60 | • | 1464                        | 1464 | <b>922</b>       | <b>1327</b> | <b>9,04</b> | <b>13,0</b> | 94,0  | 94,0 | 950                          | 1100 | 2,20        | 2,20      | 2,63  | 3,41 |      |      |
| 602567      | <b>MVSS 075/2110-S02</b> | 70 | • | 2326                        | 2326 | <b>1463</b>      | <b>2107</b> | <b>14,4</b> | <b>20,7</b> | 130   | 130  | 1500                         | 1790 | 4,10        | 4,20      | 3,55  | 2,95 |      |      |

\* Moment dynamique = 2 x moment statique.

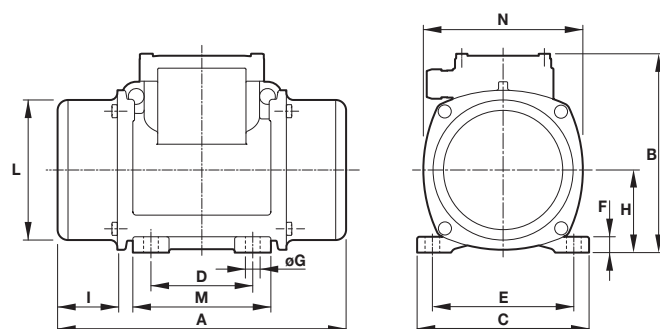

#### Caractéristiques dimensionnelles (mm)

| Type                     | Fig.     | A   | B   | C   | Trous      |            |             |          | F  | H     | I     | L   | M   | N   | Serre-câbles |
|--------------------------|----------|-----|-----|-----|------------|------------|-------------|----------|----|-------|-------|-----|-----|-----|--------------|
|                          |          |     |     |     | D          | E          | ØG          | N°       |    |       |       |     |     |     |              |
| <b>MVSS 075/150-S02</b>  | <b>W</b> | 340 | 200 | 167 | <b>105</b> | <b>140</b> | <b>13</b>   | <b>4</b> | 15 | 82,5  | 91    | 143 | 137 | 160 | M25X1,5      |
| <b>MVSS 075/260-S08</b>  | <b>W</b> | 354 | 232 | 205 | <b>120</b> | <b>170</b> | <b>17</b>   | <b>4</b> | 20 | 104,5 | 77    | 181 | 162 | 182 | M25X1,5      |
| <b>MVSS 075/400-S02</b>  | <b>W</b> | 436 | 232 | 205 | <b>120</b> | <b>170</b> | <b>17</b>   | <b>4</b> | 20 | 104,5 | 118   | 181 | 162 | 203 | M25X1,5      |
| <b>MVSS 075/660-S08</b>  | <b>W</b> | 490 | 245 | 230 | <b>140</b> | <b>190</b> | <b>17</b>   | <b>4</b> | 25 | 116   | 129   | 201 | 180 | 225 | M25X1,5      |
| <b>MVSS 075/910-S08</b>  | <b>W</b> | 560 | 245 | 230 | <b>140</b> | <b>190</b> | <b>17</b>   | <b>4</b> | 25 | 116   | 164   | 201 | 180 | 225 | M25X1,5      |
| <b>MVSS 075/1310-S08</b> | <b>W</b> | 601 | 285 | 275 | <b>155</b> | <b>225</b> | <b>22</b>   | <b>4</b> | 30 | 135   | 169   | 231 | 205 | 253 | M25X1,5      |
| <b>MVSS 075/2110-S02</b> | <b>W</b> | 657 | 323 | 310 | <b>155</b> | <b>255</b> | <b>23,5</b> | <b>4</b> | 35 | 155   | 173,5 | 269 | 215 | 295 | M25X1,5      |

la/ln = rapport entre courant de démarrage et courant max.  
Des entraxes différents de fixation sont aussi disponibles, contacter le service commercial Italvibras.